

NePort™ Overview



The NePort™ is the most compact, integrated solution available to web-enable any device with an RS-232 serial interface. By simply adding NePort to a product design, device manufacturers cut their design cycle by as much as 80% and are able to offer Ethernet connectivity in record time.

The NePort offers the highest level of integration available in a device server. Within a compact RJ45 package is a 32bits RISC, 10/100 Ethernet transceiver, high-speed serial port, status/diagnostic LEDs, and 2 programmable I/O pins. In the space that is normally consumed by a connector, the NePort provides a complete networking interface.

To enable access to a local network or the Internet, the NePort integrates a fully developed TCP/IP network stack and robust RTOS. The NePort also includes an embedded web server used to remotely configure, monitor, or troubleshoot the attached device.

Where there's a need for custom user interfaces and a desire to use common and familiar tools, the NePort can serve web pages to a web browser. The NePort becomes a conduit between you and your device over the network or Internet.

The Windows™-based configuration software, DeviceInstaller, simplifies installation and setup. The NePort can also be set up locally through its serial port, or remotely over a network using Telnet or a web browser. Flash memory provides for maintenance-free nonvolatile storage of web pages, and allows future system software upgrades.

Using our highly integrated hardware and software platform, you will add profit to your bottom line by significantly reducing product development time, risk, and cost.

Key Features

- The only complete, integrated solution in an RJ45 form factor
- Complete integrated solution
- RS-232/485/422 support
- Embedded web server
- 10/100Mbit Ethernet – Auto-Sensing
- Stable, field proven TCP/IP protocol suite and web based application framework
- Easy configuration through a web interface
- Easy customization of HTML web pages and configuration screens
- Interactive web pages through the use of Java applets
- E-mail alerts
- FTP server / client for file transmission
- SD/MMC card as local/remote file storage
- SSL/TLS support 128-, 192-, 256-bit AES or Tri - DES encryption (Optional)
- EMI tested and compliant
- Extended operating temperature:
-40 to +85° C Industrial Model
0 to +75° C Commercial Model
- High-performance processor (55MIPS on 32bits RISC)
- Network overhead handled by NePort
- Password protection
- Upgrade NePort's bootloader and firmware over the network and Serial port
- 3.3V power
- Serial-to-10/100 Ethernet conversion
Offer 1/2/3 serial ports, baud rate up to 921,600bps

Protocol and application



- With robust RTOS embedded in a 32bits RISC
- ARP, UDP, TCP, ICMP, Telnet, TFTP, AutoIP, DHCP, HTTP, for network communications.
- TCP, UDP, and Telnet for connections to the serial port.
- TFTP for firmware updates.(E version)
- FTP for file transmission
- IP for addressing, routing, and data block handling over the network.
- User Datagram Protocol (UDP) for typical datagram applications in which devices interact with other devices without maintaining a point-to-point connection.
- More details of protocol support see the NePort user guide.

Hardware & Software Description

The NePort is a complete solution (hardware and software) for web-enabling your edge devices. Packed into an RJ45 connector smaller than your thumb, this powerful device server comes with a 10BASE-T/100BASE-TX Ethernet connection, a reliable and proven operating system stored in flash memory, an embedded web server, a full TCP/IP protocol stack, and standards-based (AES) encryption.

The NePort software runs on a 32bits RISC which has 128 KB of SRAM, 32 KB of boot ROM, and a MAC with integrated 10/100BASE-TX PHY. The NePort communicates to the device through a 3.3V serial interface and three general-purpose programmable I/O pins. 512 KB of flash memory is included for storing firmware and web pages. The NePort runs on 3.3V, and has a built-in voltage supervisory circuit that will trigger a reset if the supply voltage drops to unreliable levels (2.7V).

An RJ45 Ethernet cable connects directly into an NePort. Ethernet magnetics, status LEDs, and shielding are built in. The NePort was designed to meet class B emissions levels, which makes the electromechanical integration very simple.

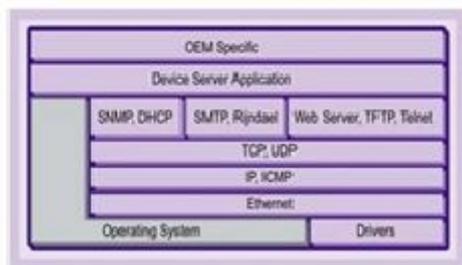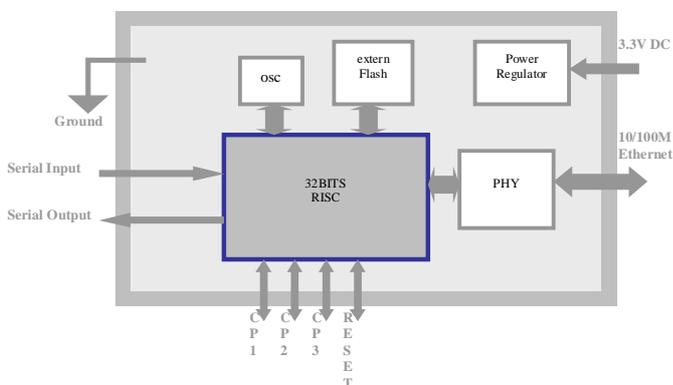

NePort - 485 Data Sheet

Table 1 - PCB Interface Signals

PCB Interface

The 8-pin PCB interface consists of 3.3V CMOS Serial In/Out, 3 Flow Control/Handshake/PIO pins, reset input, +3.3V power, and signal ground. All pins are 5V tolerant.

Signal Name	Pin	Function
GND	1	Circuit Ground
Vcc	2	+3.3V Power In
Reset (In)	3	External Reset In
Data OUT	4	Serial Data Out
Data IN	5	Serial Data In
CP1	6	<p>CP1 can be configured as follows:</p> <ul style="list-style-type: none"> Flow control: RTS (Request to Send) Programmable input/output: CP1 can be driven or read through software control, independent of serial port activity. Indicator: CP1 can be configured as system led or link indicator(tcp connection Status) RS485 controller: rs485 controller, Receive output enable
CP2	7	<p>CP2 can be configured as follows:</p> <ul style="list-style-type: none"> Default setting: I Input read by internal RISC for setting the default parameters. Upgrade loader: Input read by the internal RISC for enter. Upgrade mode
CP3	8	<p>CP3 can be configured as follows:</p> <ul style="list-style-type: none"> Flow control: CTS (Clear to Send) Indicator: CP3 can be configured as System led or link indicator(tcp connection Status) Programmable input/output: CP3 can be driven or read through software control, independent of serial port activity RS485 controller: rs485 controller, Transmit output enable

Ethernet Interface

The 10/100 Ethernet magnetics, network status LEDs, and RJ45 connector are integrated into the NePort.

Table 2 - Ethernet Interface Signals

Signal Name	DIR	Contact	Primary Function
TX+	Out	1	Transmit Data +
TX-	Out	2	Transmit Data -
RX+	In	3	Receive Data +
RX-	In	6	Receive Data -

Protocol Support

The NePort uses Internet Protocol (IP) for network communications and Transmission Control Protocol (TCP) to assure that no data is lost or duplicated, and that everything sent arrives correctly at the target.



Other supported protocols are listed below:

- ARP, UDP, TCP, ICMP, Telnet, TFTP, AutoIP, DHCP, HTTP, for network communications.
- TCP, UDP, and Telnet for connections to the serial port.
- TFTP for firmware updates.(EN version)
- IP for addressing, routing, and data block handling over the network.
- User Datagram Protocol (UDP) for typical datagram applications in which devices interact with other devices without maintaining a point-to-point connection.
- For a complete discussion of protocol support, see the NePort user guide.

LEDs



The device contains two bi-color LEDs built into the front of the NePort connector. (See dimension drawing for location.)

Link LED (Left Side)		Activity LED (Right Side)	
Color	Meaning	Color	Meaning
Off	No Link	Off	No Activity
Amber	10 Mbps	Amber	Half-Duplex
Green	100 Mbps	Green	Full-Duplex

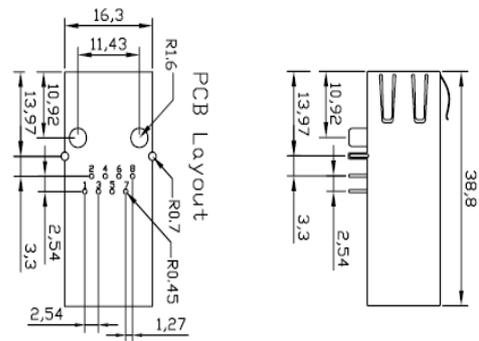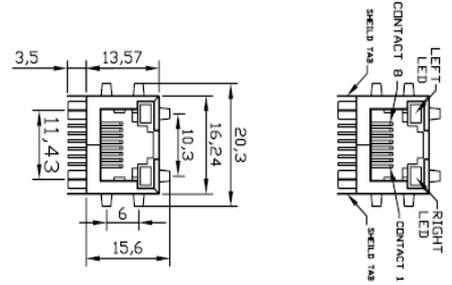

Recommended PC Board Layout

The hole pattern and mounting dimensions for the NePort are shown in the following drawing:

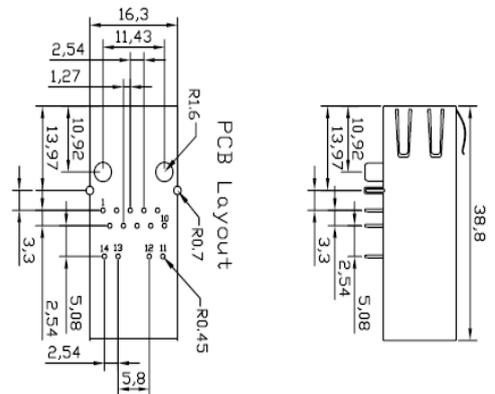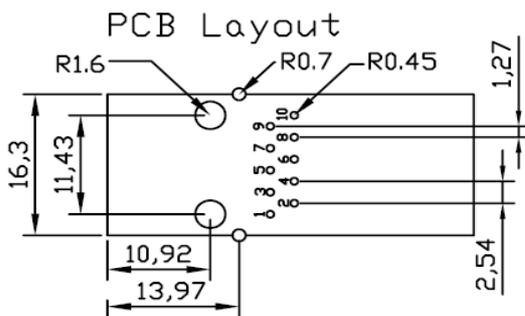

For proper heat dissipation, the PCB should have approximately 1 square inch of copper attached to the shield tabs. The shield tabs are an important source of heat sinking for the device.

Dimensions

The NePort dimensions are shown in the following drawings:

NePort Technical Data

Category	Description
CPU, Memory	32bits RISC(55MIPS), 128/256 KB zero wait state SRAM 256/512 KB Flash, 32 KB Boot ROM
Firmware Reset Circuit	Upgradeable via serial port or tftp Internal 200ms power-up reset pulse. Power-drop reset triggered at 2.6V. External reset input causes an internal 200ms reset.
Serial Interface	CMOS (Asynchronous) 3.3V-level signals Rate is software selectable (110 bps to 921600 bps) Offer 1-3 high speed serial ports
Serial Line Formats	7 or 8 data bits, 1-2 Stop bits, Parity: odd, even, mark, space, none
Modem Control	CTS, RTS
Flow Control	XON/XOFF (software), CTS/RTS (hardware), none
Programmable I/O	2 PIO pins (software selectable) sink or source 4mA max.
Network Interface	RJ45 Ethernet 10BASE-T or 100BASE-TX (auto-sensing)
Compatibility Protocols Supported	Ethernet: Version 2.0/IEEE 802.3 ARP, UDP/IP, TCP/IP, PING/ICMP, DHCP, BOOTP, Auto IP,TFTP, SNTP ,TELNET ,HTTP, DNS,SMTP, PPP, LCP, PAP, CHAP, IPCP, PPPoE SSL/TLS,HTTPS ,SNMP(Optional) FTP Server/Client (Optional)
LEDs	10BASE-T & 100BASE-TX Link Activity, Full/half duplex.
Management	Internal web server, Serial login, Telnet login, Device manager(PC tool)
Security	Password protection, locking features, optional Rijndael 128-, 192-, 256-, or Tri - DES encryption
Internal Web Server	Serves web pages Storage capacity: 128Kb – 4Mb Huge memory space for user web. (user can update the web online, support the web embedded java-script or java applet)
Weight	9.6 grams (0.34 oz)
Material	Metal shell, thermoplastic case
Temperature	Operating range: -40°C to +85°C (-40°F to 185°F) Industrial Model 0°C to +75°C (-40°F to 167°F) Commercial Model Storage range: -40°C to +85°C (-40°F to 185°F)
Relative Humidity	Operating: 5% to 95% non-condensing
Shock/Vibration	Non-operational shock: 500 g's, Non-operational vibration: 20 g's
Warranty Included Software EMI Compliance	1-year limited warranty Windows™ 98/NT/2000/XP-based DeviceInstaller configuration software and Windows™ based Comm Port Redirector Radiated & conducted emissions - complies with Class B limits of EN 55022:1998 Direct & Indirect ESD - complies with EN55024:1998 RF Electromagnetic Field Immunity - complies with EN55024:1998 Electrical Fast Transient/Burst Immunity - complies with EN55024:1998 Power Frequency Magnetic Field Immunity - complies with EN55024:1998 RF Common Mode Conducted Susceptibility - complies with EN55024:1998

DC Characteristics for Serial, PIO, and Power Interface

Symbol	Parameter	Min	Nominal	Max	Units
V _{CC}	Supply voltage (typical 3.3) (+/-5%)	3.14	3.3	3.46	V
V _{IL}	Low Level Input Voltage	0		0.8	V
V _{IH}	High Level Input Voltage	2.0		5.5	V
V _{OL}	Low Level Output Voltage			0.4	V
V _{OH}	High Level Output Voltage	2.4			V
I _I	Input Leakage Current			1	µA
I _{CC}	Supply Current (10BASE-T activity)		155		mA
I _{CC}	Supply Current (100BASE-T activity)		165		mA

With the purchase of NePort, the OEM agrees to an OEM firmware license agreement that grants the OEM a nonexclusive, royalty-free firmware license to use and distribute the binary firmware image provided, only to the extent necessary to use the NePort hardware

Web Configuration

CONEXTOP

Net embed & Device Networking

NePort-EN: NP1001001E-03
Firmware Version: V6.1.1.R5

Home

Basic Setting

Network

PPPoE

Server

Serial Tunnel 0

Hostlist

Channel 0

Serial Settings

Connection

Email

Email Settings

Trigger Settings

Input Trigger Settings

Password Setting

Load Defaults

Apply/Restart

Log Out

Welcome to NePort Web Console!

Model Name:	NePort-EN
Order No.:	NP1001001E-03
Firmware Version:	V6.1.1.R5
System Uptime:	6/10/2006

Basic Settings
Server name, real time clock, time server name, and Web console, Telnet console Enable, Disable function.

Network Settings
IP Configure and Ethernet Configure.

Server
ARP, TCP, BOOTUP, CPU mode, HTTP server port and MTU size settings.

Hostlist
Retry Counter, Retry Timeout and host information settings.

Serial Settings
Port set, Pack control and Flush mode control.

PPPoE Configuration

CONEXTOP

Net embed & Device Networking

NePort-EN: NP1001001E-03
Firmware Version: V6.1.1.R5

Home

Basic Setting

Network

PPPoE

Server

Serial Tunnel 0

Hostlist

Channel 0

Serial Settings

Connection

Email

Email Settings

Trigger Settings

Input Trigger Settings

Password Setting

Load Defaults

Apply/Restart

Log Out

PPPoE Settings

PPPoE Configuration:

User Name:

Password:

Work Mode: ▼

Max Redial Times:

Redial Interval:

Idle Time:

PPPoE Status:

Link Status:	deactive
PPPoE IP:	0.0.0.0
PPPoE Gateway:	0.0.0.0
PPPoE DNS1:	0.0.0.0
PPPoE DNS2:	0.0.0.0

Ordering Information

Model	Part Number	Description
NePort-485	NP1001003-02-485	Std. NePort with RS-485 support Min. order: 120 units
NePort-485 SEC *	NP1001003-02-485-SEC	Std. NePort with RS-485 support with encryption Min. order: 120 units
NePort-232	NP1001003-02	Std. NePort with RS-232 support Min. order: 100 units
NePort-232 SEC *	NP1001003-02-SEC	Std. NePort with RS-232 support with encryption Min. order: 120 units

(* : Models valid in EU only)

For details contact your local Conextop representative or Conextop directly:

Asia Pacific Region via e-mail at sales@Conextop.com

Europe via e-mail at eu_sales@Conextop.com

United States via e-mail at us_sales@Conextop.com

or call OEM sales support at 86-755-26505615

More details about NePort at <http://www.conextop.com>

©2003 Conextop, Inc. All rights reserved. Conextop, NePort, with its patent-pending technology, and neChip are trademarks of Conextop. All other trademarks are the property of their respective owners. Specifications subject to change without notice. All rights reserved.